



TECHNICAL DATA SHEET

AQUA SHIELD LV

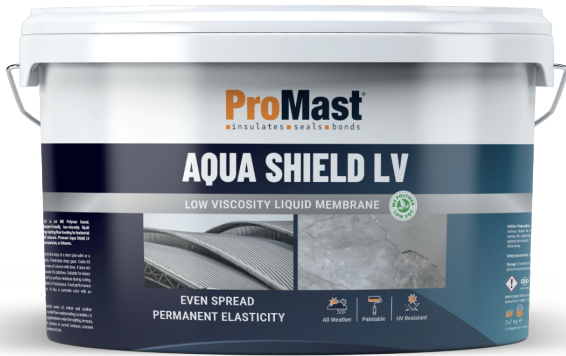

Promast Aqua Shield LV

Promast Aqua Shield LV is a MS Polymer based, single-component, environment-friendly, low-viscosity liquid sealant. It is preferred for long-lasting floor leveling for horizontal areas. Suitable to use for all seasons. Promast Aqua Shield LV does not contain solvents, isocyanates, or bitumen.

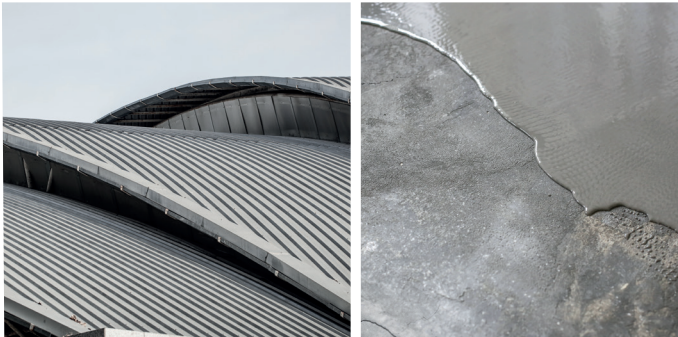

TECHNICAL DATA

| | |
|---|--------------------------|
| ■ Basis | MS Polymer |
| ■ Consistency | Stable Paste |
| ■ Curing System | Moisture Curing |
| ■ Tack-Free Time | Ca. 60 mins |
| ■ Skin Formation Time* (20C° / 65% R.H) | Ca. 20 mins |
| ■ Density | 1,34 ± 0,05 g/ml |
| ■ Temperature Resistance | -40 °C → 90 °C |
| ■ Max. Tension (DIN 53504) | > 1,20 N/mm ² |
| ■ Elogation at Break (DIN 53504) | %400 |
| ■ Application Temperature | 5 °C - 35 °C |
| ■ Viscosity | 9.500 CPS |
| ■ Shelf Life | 15 Months |

(*) these values may vary depending on environmental factors such as temperature, moisture, and type of substrates.

APPLICATIONS AREAS

- All horizontal areas of; Indoor and outdoor applications,
- Wet areas where underfloor waterproofing is needed / In wet underfloor waterproofing applications under the building,
- Terraces,
- Balconies,
- Roofs,
- Bridges and domes or curved surfaces,
- Concrete areas where movement is experienced,
- Concrete cracks,
- Water tanks...

SPECIFICATIONS

- It's applied with the help of a short pile roller, or a squeegee.
- Prolonged elasticity.
- Penetrates deep gaps.
- Cures 60 minutes after application—no loss of volume with time.
- It does not contain any hazardous chemicals; it's odorless.
- Suitable for indoor and outdoor use.
- Not affected by surface moisture during curing does not bubble.
- It has excellent UV resistance.
- Good performance in harsh weather conditions.
- It has a concrete color with an over-paintable feature.

TECHNICAL DATA SHEET

AQUA SHIELD LV

REMARKS

- Promast Aqua Shield LV may be overpainted with water-based paints; however, we strongly suggest a compatibility test before the application due to the many colors and varnishes available.
- The drying time of alkyd resin-based paints may increase.
- Promast Aqua Shield HV can be applied to a wide variety of substrates.
- However, we recommend a preliminary compatibility test because specific substrates, such as plastics, polycarbonate, etc., may differ from manufacturer to manufacturer.
- Promast Aqua Shield LV can not be used as a glazing sealant.
- Not suitable for bonding aquariums.
- Promast Aqua Shield LV has good UV resistance but can discolor under extreme conditions or after very long UV exposure.
- Discoloration may occur due to chemicals, high temperatures, and UV radiation. However, a change in color does not affect the technical properties of the product.

CHEMICAL RESISTANCE

Good resistance to (salt)water, aliphatic solvents, hydrocarbons, ketones, esters, alcohols, diluted mineral acids and alkalis. Poor resistance to aromatic solvents, concentrated acids and chlorinated hydrocarbons.

SURFACE PREPARATION

- Aqua Shield LV is ready to use.
- Non-porous surfaces should be cleaned with a solvent-based cleaner before starting the application.
- Make sure the solvent evaporates before applying the product. The benefit of masking tape could be used for critical areas.
- A liner is not needed before the application.

APPLICATION METHOD

Method: a short pile roller, a squeegee

Application Temperature: Between +5C to +35C

PACKAGING

14 kg bucket inside 2x7kg aluminum foil bags

12 months in unopened packaging in a cool and dry storage place at temperatures between +5°C and +25°C.

COLOR



Concrete Grey



MANUFACTURER:
 PROMAST Kimya San. Tic. A.Ş. Ovacık Mh.
 Hacıoğlu Sk. No:21 B/0 41140 Başiskele
 KOCAELİ | TURKEY T: +90 (262) 335 41 82
 F: +90 (262) 335 41 83